

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BR 95



Safe loading and unloading

Single point lifting device and optional transport wheels



Robust machine design

Engine protection guard and cyclone air pre-filter




Comfortable ride and handling

Low HAV ($<2.5\text{m/s}^2$), comfortable driving grip and good driving characteristics

Shipping dimensions in m3

BR 95

0,220

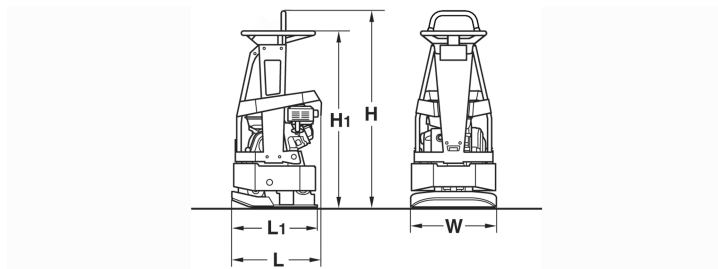

Standard Equipment

- ☒ Vibration damped comfort handle
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Engine protection frame
- ☒ Single point lifting device
- ☒ additional large single-point suspension (removable)
- ☒ 3-2-1 Warranty
- ☒ Automatic shutdown at low oil level
- ☒ Fully protected V-belt

Optional Equipment

- ☐ Transport wheels
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ Tough Warranty

Dimensions in mm

	H	H1	L	L1	W
BR 95	1030	930	475	450	450

Technical Data

BOMAG

BR 95

Weights

Operating weight CECE	kg	92
Basic weight	kg	90

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 160
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW
Speed	min-1
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	l/h

Exciter system

Frequency	Hz	90
Centrifugal force	kN	15
Amplitude	mm	1,6

Capacities

Fuel	l	3,1
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 630 21 010

210122 Sa01

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

