

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 12/35



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised




All-round protection

Machine equipped with protective bar as standard

Shipping dimensions in m3

BP 12/35

0,153

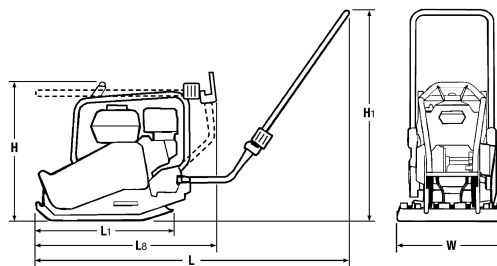

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s²
- ☒ Automatic shutdown at low oil level
- ☒ Engine protection frame
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (10l)
- ☐ Sprinkler system (7l)
- ☐ Spraying system, base plate (350mm)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 12/35	554	854	1280	532	788	350

Technical Data

BOMAG BP 12/35

Weights

Operating weight CECE	kg	67
Basic weight	kg	67

Dimensions

Working width	mm	350
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Briggs&Stratton
Engine type	XR550
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	l/h 0,9

Exciter system

Frequency	Hz	92
Centrifugal force	kN	12
Amplitude	mm	1,75

Capacities

Fuel	l	2,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 630 08 010

091025 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

