

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 20/45



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised




All-round protection

Protective bar and cyclone filter (GX 160) as standard

Shipping dimensions in m3

BP 20/45

0,186

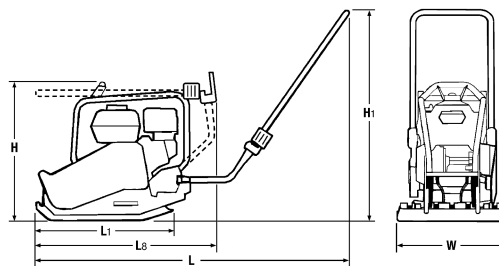

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s²
- ☒ Cyclone dust separator
- ☒ Engine protection frame
- ☒ Automatic shutdown at low oil level
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (10l)
- ☐ Sprinkler system (7l)
- ☐ Spraying system, base plate (450mm)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 20/45	567	861	1276	558	730	450

Technical Data

BOMAG BP 20/45

Weights

Operating weight CECE	kg	92
Basic weight	kg	91

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	
Engine type	GX 160	
Emission stage	Stage V / CARB P.3	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	kW	3,6
Speed	min-1	3.600
Drive system	mech.	
Fuel	Gasoline	
Fuel comsump. aver. during operation	l/h	1,1

Exciter system

Frequency	Hz	90
Centrifugal force	kN	20
Amplitude	mm	2,00

Capacities

Fuel	l	3,1
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 834 96 010

270525 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

